


## LOW VOLTAGE SCHOTTKY RECTIFIER

### Features

- Low forward voltage drop and leakage current
- Low power loss and High efficiency
- ESD capability
- Dual common cathode rectifier
- Full lead (Pb)-free and RoHS compliant device

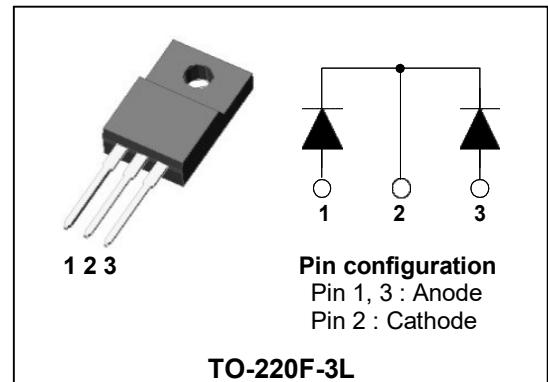

### Applications

- Power supply - Output rectification
- High efficiency SMPS
- Free-wheeling diode
- Reverse battery protection
- DC to DC systems

### Product Characteristics

$I_{F(AV)}$	<b>2 X 10A</b>
$V_{RRM}$	<b>40V</b>
$V_{FM}$ at 125°C	<b>0.50V</b>
$I_{FSM}$	<b>120A</b>


### Description

The KDB2040PI has two schottky barriers arranged in a common cathode configuration. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection

### Ordering Information

Device	Marking Code	Package	Packaging
KDB2040PI	KDB2040.	TO-220F-3L	Tube

### Marking Information

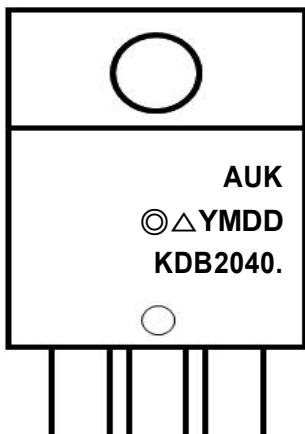

**AUK = Manufacture Logo**

**◎ = Option Code(H:Halogen free)**

**△ = Factory Management Code**

**YMDD = Date Code Marking**

- . Y = Year Code

- . M = Monthly Code

- . DD = Daily Code

**KDB2040 = Specific Device Code**

- . . = Dalian

## Absolute Maximum Ratings (Limiting Values)

Characteristic	Symbol	Value	Unit
Maximum repetitive reverse voltage Maximum working peak reverse voltage Maximum DC blocking voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	40	V
Maximum average forward rectified current	per diode I <sub>F(AV)</sub>	10	A
	total device	20	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode	I <sub>FSM</sub>	120	A
Storage temperature range	T <sub>stg</sub>	-45°C to +150°C	°C
Maximum operating junction temperature	T <sub>J</sub>	150	°C

## Thermal Characteristics


Characteristic	Symbol	Value	Unit
Maximum thermal resistance junction to case	per diode R <sub>th(j-c)</sub>	4.0	°C/W
	total device	3.5	

## Electrical Characteristics (Per Diode)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Peak forward voltage drop	V <sub>FM</sub> <sup>(1)</sup>	I <sub>FM</sub> = 10A	T <sub>J</sub> =25°C	-	-	0.55 V
			T <sub>J</sub> =125°C	-	-	0.50 V
Reverse leakage current	I <sub>RM</sub> <sup>(1)</sup>	V <sub>R</sub> = V <sub>RRM</sub>	T <sub>J</sub> =25°C	-	-	1.5 mA
			T <sub>J</sub> =125°C	-	-	150 mA
Junction capacitance	C <sub>j</sub>	V <sub>R</sub> = 10V <sub>DC</sub> , f=1MHz	-	600	-	pF


Note : (1) Pulse test : t<sub>p</sub>≤380 μs, Duty cycle≤2%

To evaluate the conduction losses use the following equation (Fig 4.) : P<sub>F</sub> = 0.35 x I<sub>F(AV)</sub> + 0.015 I<sub>F(RMS)</sub><sup>2</sup>

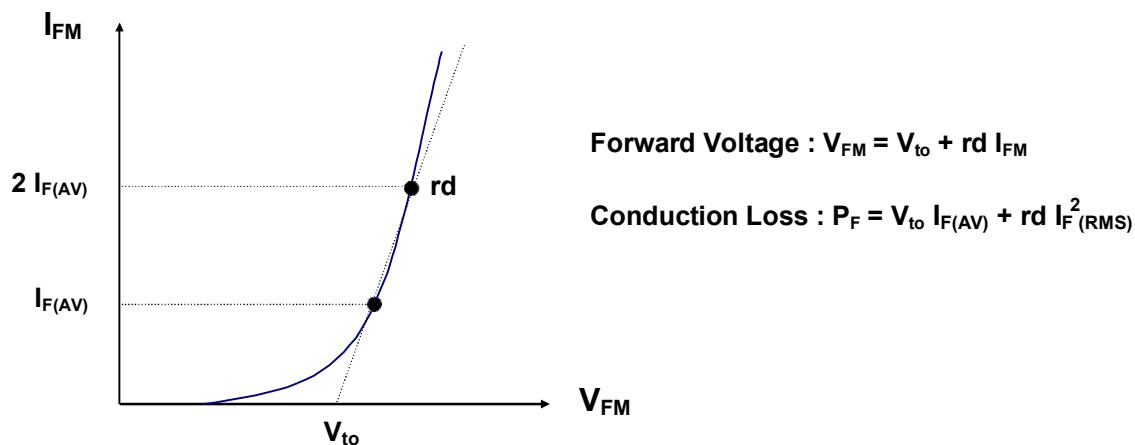


## Rating and Characteristic Curves


**Fig. 1) Typical Forward Characteristics (Per diode)**

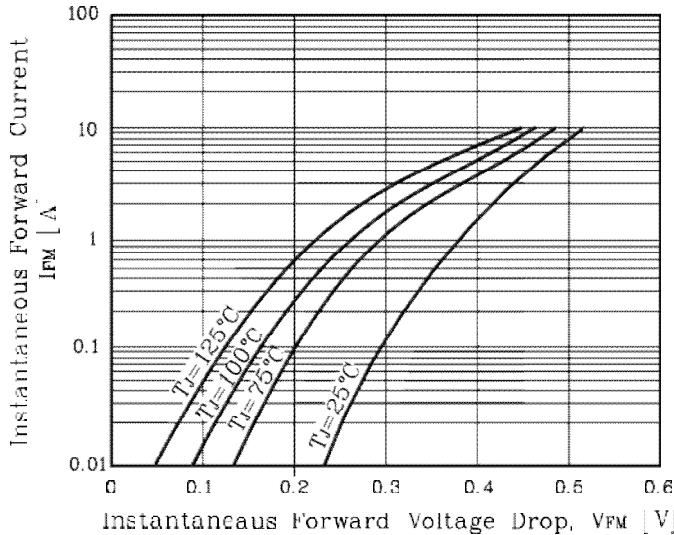


**Fig. 2) Typical Reverse Characteristics (Per diode)**

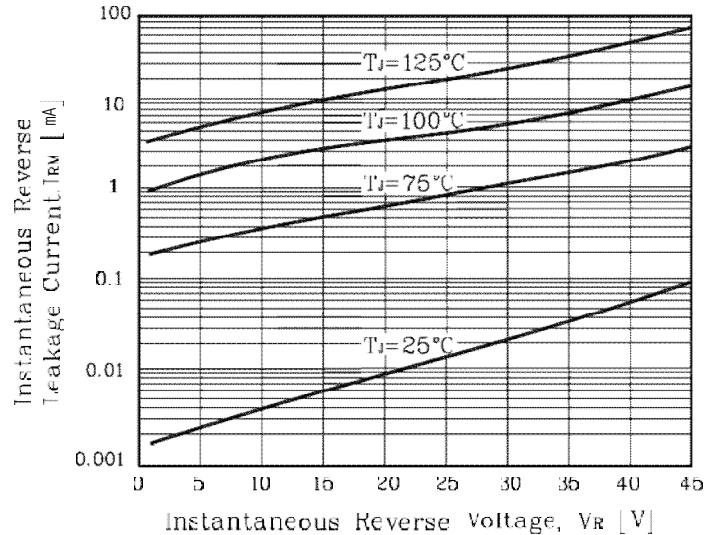


**Fig. 3) Maximum Forward Derivative Curve**

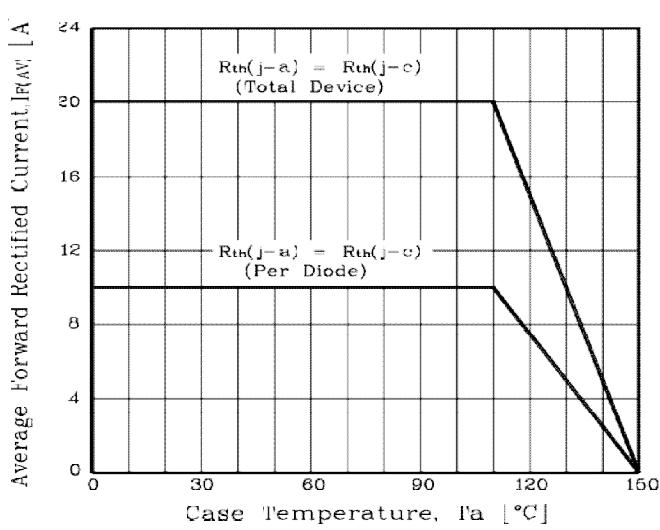


**Fig. 4) Forward Power Dissipation (Per diode)**

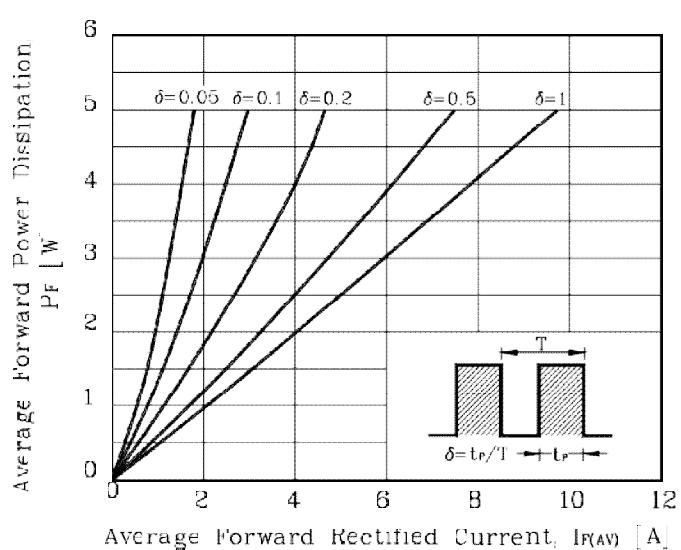


**Fig. 5) Maximum Non-Repetitive Peak Forward Surge Current (Per diode)**

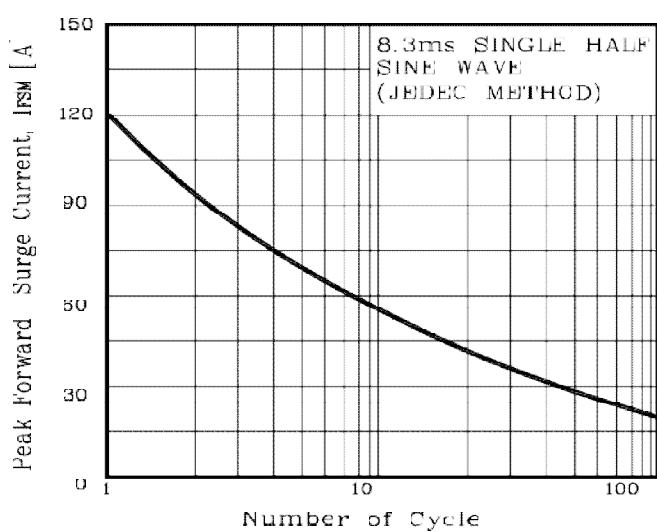

**Fig. 6) Typical Junction Capacitance (Per diode)**

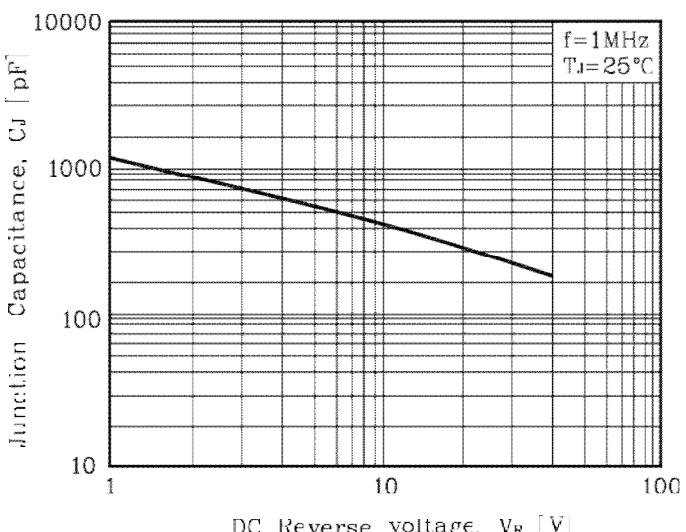

## Package Outline Dimension

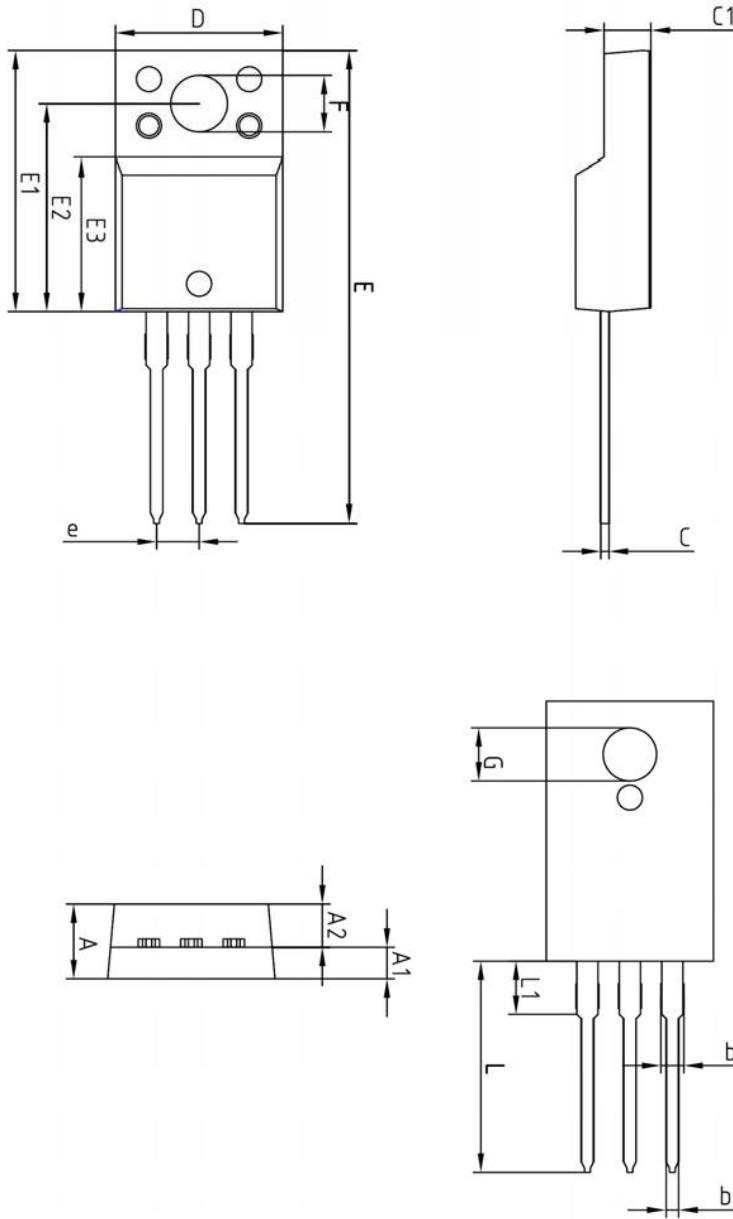

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	—	—	4.60	
A1	2.45	2.50	2.55	
A2	1.95	2.00	2.05	
b	0.65	0.75	0.85	
b1	1.07	1.27	1.47	
C	0.40	0.50	0.60	
C1	2.70	2.80	2.90	
D	9.90	10.00	10.10	
E	28.00	—	28.60	
E1	15.50	15.60	15.70	
E2	12.30	12.40	12.50	
E3	9.15	9.20	9.25	
F	3.30	3.40	3.50	
G	3.10	3.20	3.30	
e	2.54 BSC			
L	12.40	—	13.00	
L1	3.46 BSC			

**The AUK Dalian Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).**

**Please make sure that you consult with us before you use these AUK Dalian Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Dalian Corp. cannot accept liability to any damage which may occur in case these AUK Dalian Corp. products were used in the mentioned equipments without prior consultation with AUK Dalian Corp..**

**Specifications mentioned in this publication are subject to change without notice.**